

# AMSEC ESL5, ESL10 and ESL20

MAG557318

This template was designed with drill points for the following locks:  
Amsec ESL5, ESL 10, ESL15 and ESL 20

The labels on the templates are as follows:

D - Deadlock

S - Solenoid pin / plunger

R - Relock


5L - Blocking slide on left hand swingbolt (ESL5 & 15)

5R - Blocking slide on right hand swingbolt (ESL5 & 15)

The template is illustrated with the drill points positioned for a right hand mounted lock. Depending on the lock mounting in the safe, the template can be rotated and mounted for any hand lock.

To mount the template, remove the keypad and the keypad base from the safe. Use the provided 8-32 screws to secure the template to the safe, orienting the template in the proper handing position.

To mount the Bullet II base to the template, choose the proper drill point and attach the Bullet II base to the template using the 8-32 screws.

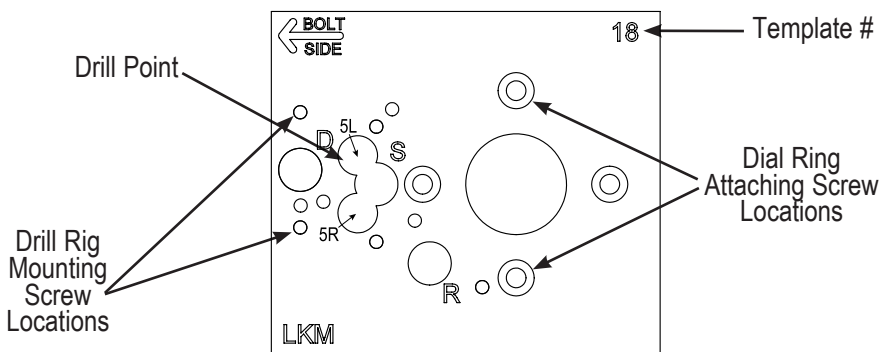

MAG557318INST

Copyright © 2015 Lockmasters Inc. 3/15

**LOCKMASTERS**  
INCORPORATED

Fax 859.885.1731  
800.654.0637

2101 John C. Watts Dr.,  
Nicholasville, KY 40356

salesinfo@lockmasters.com  
www.lockmasters.com